
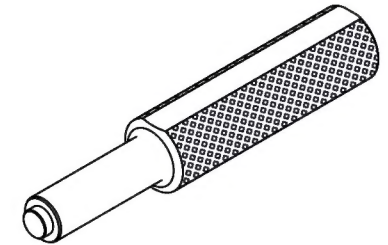


This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.

REVISIONS				
REV	DESCRIPTION	DATE	INITIAL	APPROVED
A	ADDED .455 REF. DIMENSION.	9/24/2009	WP	GE
1	CH'D HANDLE DIA., FROM ϕ 1.20 TO ϕ 1.28. REF. DIM. WAS .455 IS NOW .767.	9/28/2009	WP	GE
2	CH'D OD. WAS ϕ 1.28 IS ϕ 1.276, MILLED FLAT WAS .51 IS .587 REF., AND .767 REF. TO .50 REF. CH'D .032x60° TO .03 @ 30°, AND .08x60° TO .08@60°. ALSO ADDED VISIBLE KNURLING.	10/3/2009	WP	RW
2A	CH'D WAS CLEAR HARD ANODIZING IS CLEAR ANODIZING AND ADDED KNURL NOTE.	10/27/2010	WP	GE
2B	SEPERATED TOOLS FROM KIT RBW6205G00331-3G. CH'D DIM. LOCATION WAS REF. .587 IS 1.23. ADDED AW139 TO USED ON MODEL.	10/17/2013	CFS	RW

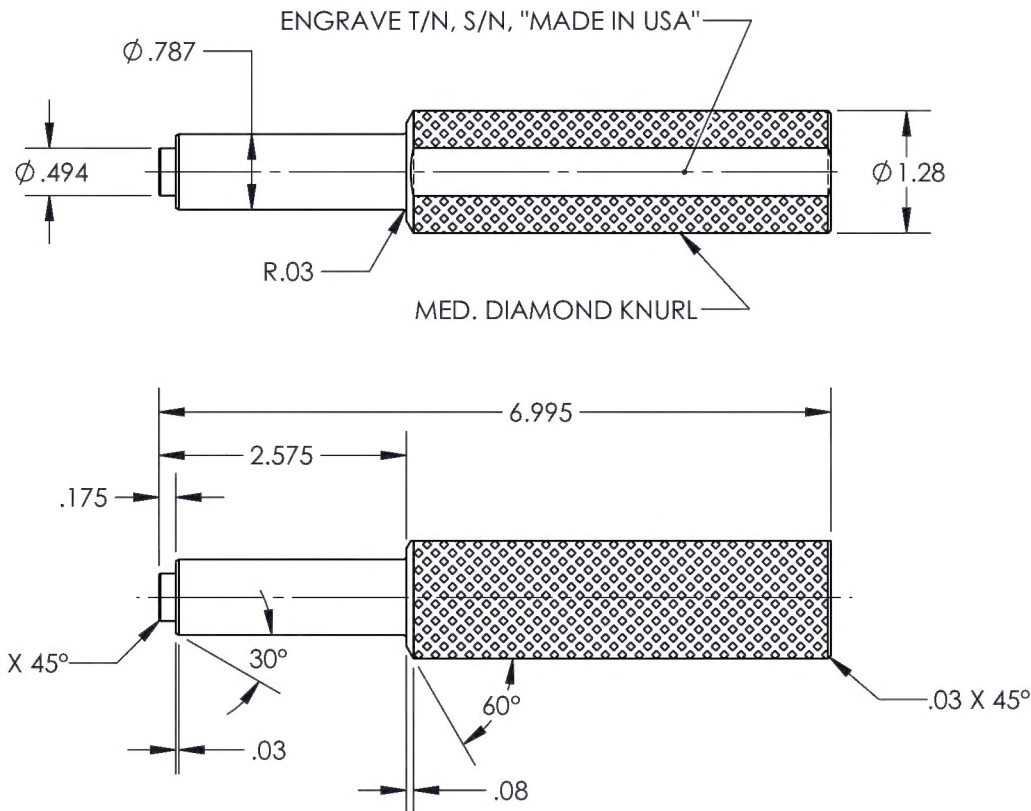

RED BARN MACHINE	
TITLE M/R BLADE RETENSION BOLT PULLER	
DWG NO. RBW6205G08451-3G	REV 2B
MAT'L 6061	DRAWN BY: SMITH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	APPROVED <i>D Weil</i>
.XXX ± .005 .XX ± .01 .X ± .1	HEAT TREAT FINISH CLEAR ANODIZE
FRACTIONS ± 1/32 ANGLES ± 5°	SPEC MIL-A-8625F, TYPE II, CLASS I
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	USED ON MODEL
2. DIMENSIONAL LIMITS APPLY AFTER PLATING	AGUSTA AW139
SCALE 1:2	DATE 10/17/2013
SHEET 1 OF 1	

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
				1	PULLER	6061	ϕ 1-3/8 X 7-1/8	1